P-KUBE Smart safety handles for ST series RFID sensors

Description



P-KUBE Smart safety handle can be used together with the RFID safety sensors of the ST series to create a modern and effective interlock system for all guards of machines without inertia.

This product series combines the characteristics of a robust handle for safety enclosures, with an ergonomic, rounded grip and customisable functions for the customer, with various illuminated signalling options, to reflect the state of the guard, or other operating conditions the manufacturer wishes to indicate.


Depending on user needs, the new handles also allow integration of a control device (e.g. a button), directly in the grip.

Adaptability and flexibility

The same article code can be used both on hinged doors and sliding doors, with an opening both on the right and on the left side. Furthermore, it is possible to install the handle with horizontal or vertical grip, so that it can also be mounted on doors or compact guards along the external frame.



Vertical mounting with sensor on the left side



Horizontal mounting




Vertical mounting with sensor on the right side

Double fixing possibility

For applications on light or compact guards, it is possible to order the version with fixing directly on the handle using the two internal threaded inserts.

In the case of application on heavier guards, it is possible to fix the handle through an internal 5mm auxiliary plate, made of painted steel, to guarantee strength and long duration.

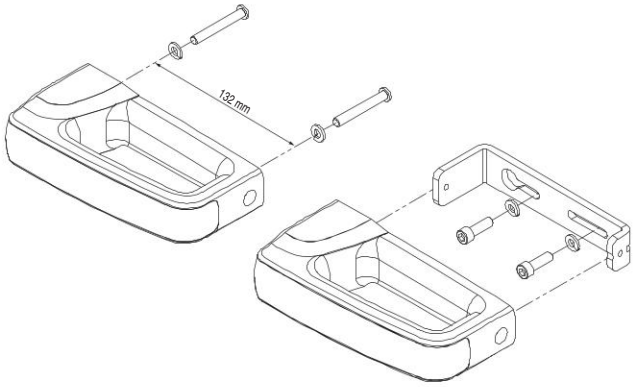

Chrome-plated or illuminated grip

The grip is available with front strip in two finishes: satin chrome, and illuminated white. In the second version, the grip can be illuminated using RGB LED technology.

The modern, ergonomic design, combined with fully concealed fixing screws and wiring, allows implementation of machines and guards with particularly pleasing aesthetics.




Integrated control device

In the grip of the P-KUBE Smart handle, a spring-return button with 1NO contact can be integrated. This can be illuminated with a LED, and thus allows interaction with the machinery; for example to request machine stop, or transmit a reset command. The button is available in white, red, green, yellow, blue, and black.



Protection against tampering

The P-KUBE Smart handle is supplied complete with snap-on protection caps to be applied to the holes of the fixing screws, so as to prevent access: therefore, standard screws can be used instead of tamper-proof screws, ensuring safety against deliberate tampering on the device. The caps also prevent the accumulation of soiling and facilitate the cleaning of the handle.

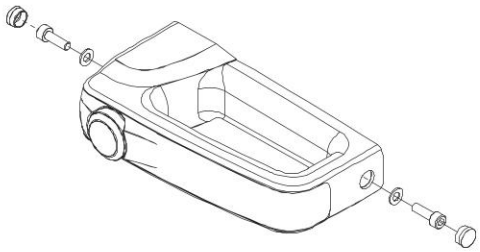

Connections

The electrical connections are made through a cable that comes out at the back of the device and can therefore be easily housed inside the frame of the guard, so as to make it completely invisible. This feature has a double advantage: contributing to the aesthetics of the machine and ensuring that the cable is protected from damage and tampering.

The P-KUBE Smart handle is available with PVC cable connections or with cable and integrated M12 connector.



Available versions

Thanks to the wide range of configurations available, the P-KUBE Smart safety handle can be ordered in the version that best suits the user's needs. Customization options apply to the grip, which can be supplied with or without a control device, or with or without RGB LED lighting. This feature allows you to identify the most suitable product for a specific application or to diversify the handles that are installed on the same system, depending on the needs of machine designers and installers.



- Without control device
- Satin chrome grip non-illuminated



- Without control device
- White grip, can be illuminated with RGB LEDs




- With control device, can be illuminated
- Satin chrome grip non-illuminated



- With control device, can be illuminated
- White grip, can be illuminated with RGB LEDs

Customisable multicoloured illumination

The P-KUBE Smart handle, with illuminated grip, allows the machine manufacturer to locally signal the state of the guard by using various colours, and fully customisable sequences. Thanks to RGB LED technology, the handle illumination is visible from a large distance; even in brightly-lit environments. The device illuminates in colours: green, yellow, red, blue, white, purple, light blue.

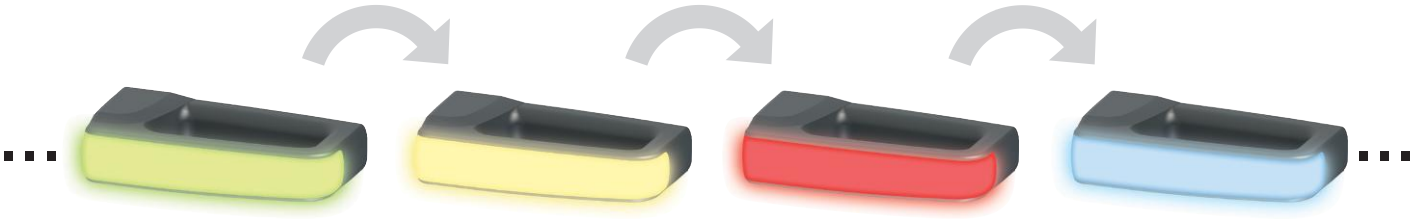


MACHINE MOVING | MALFUNCTIONS | MACHINE STANDSTILL | WAITING FOR RESET AND START

Universal handle

The P-KUBE Smart handle is also available in the version without RFID tag, so that it can be used as a simple handle to open a guard, regardless of the type of safety switch with which the door interlock is made of.

In this configuration, it is possible to use the versions with illuminated grip, to create an integrated visual signal system without the need to install further devices on board of the machine.

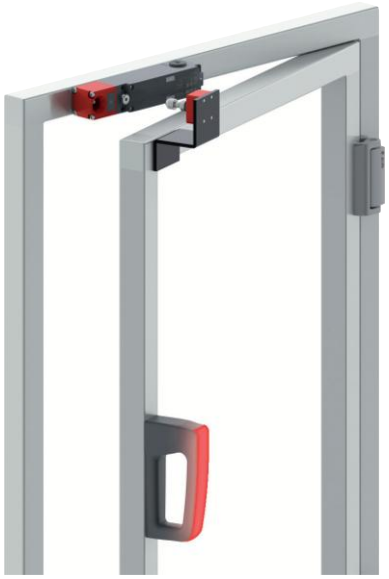


Compatible with P-KUBE Krome


Designed with the same handle size and the same interaxle spacings for the fixing holes of the inner plate, the P-KUBE Smart series can be used as inner handle in guards using the P-KUBE Krome safety handle for NS and NG series RFID saftey switches with lock.

The mounting turns out to be practical and quick, as the two handles can be fixed by using only two holes passing through the frame and two screws of adequate length.

All these elements put together form a system with uniform lines and with aesthetic continuity between the inner and outer handle.

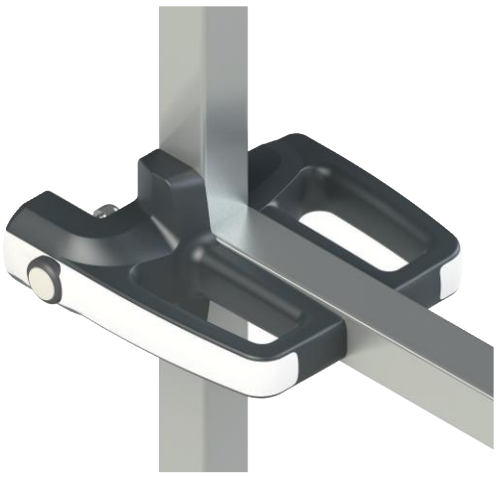

Selection diagram

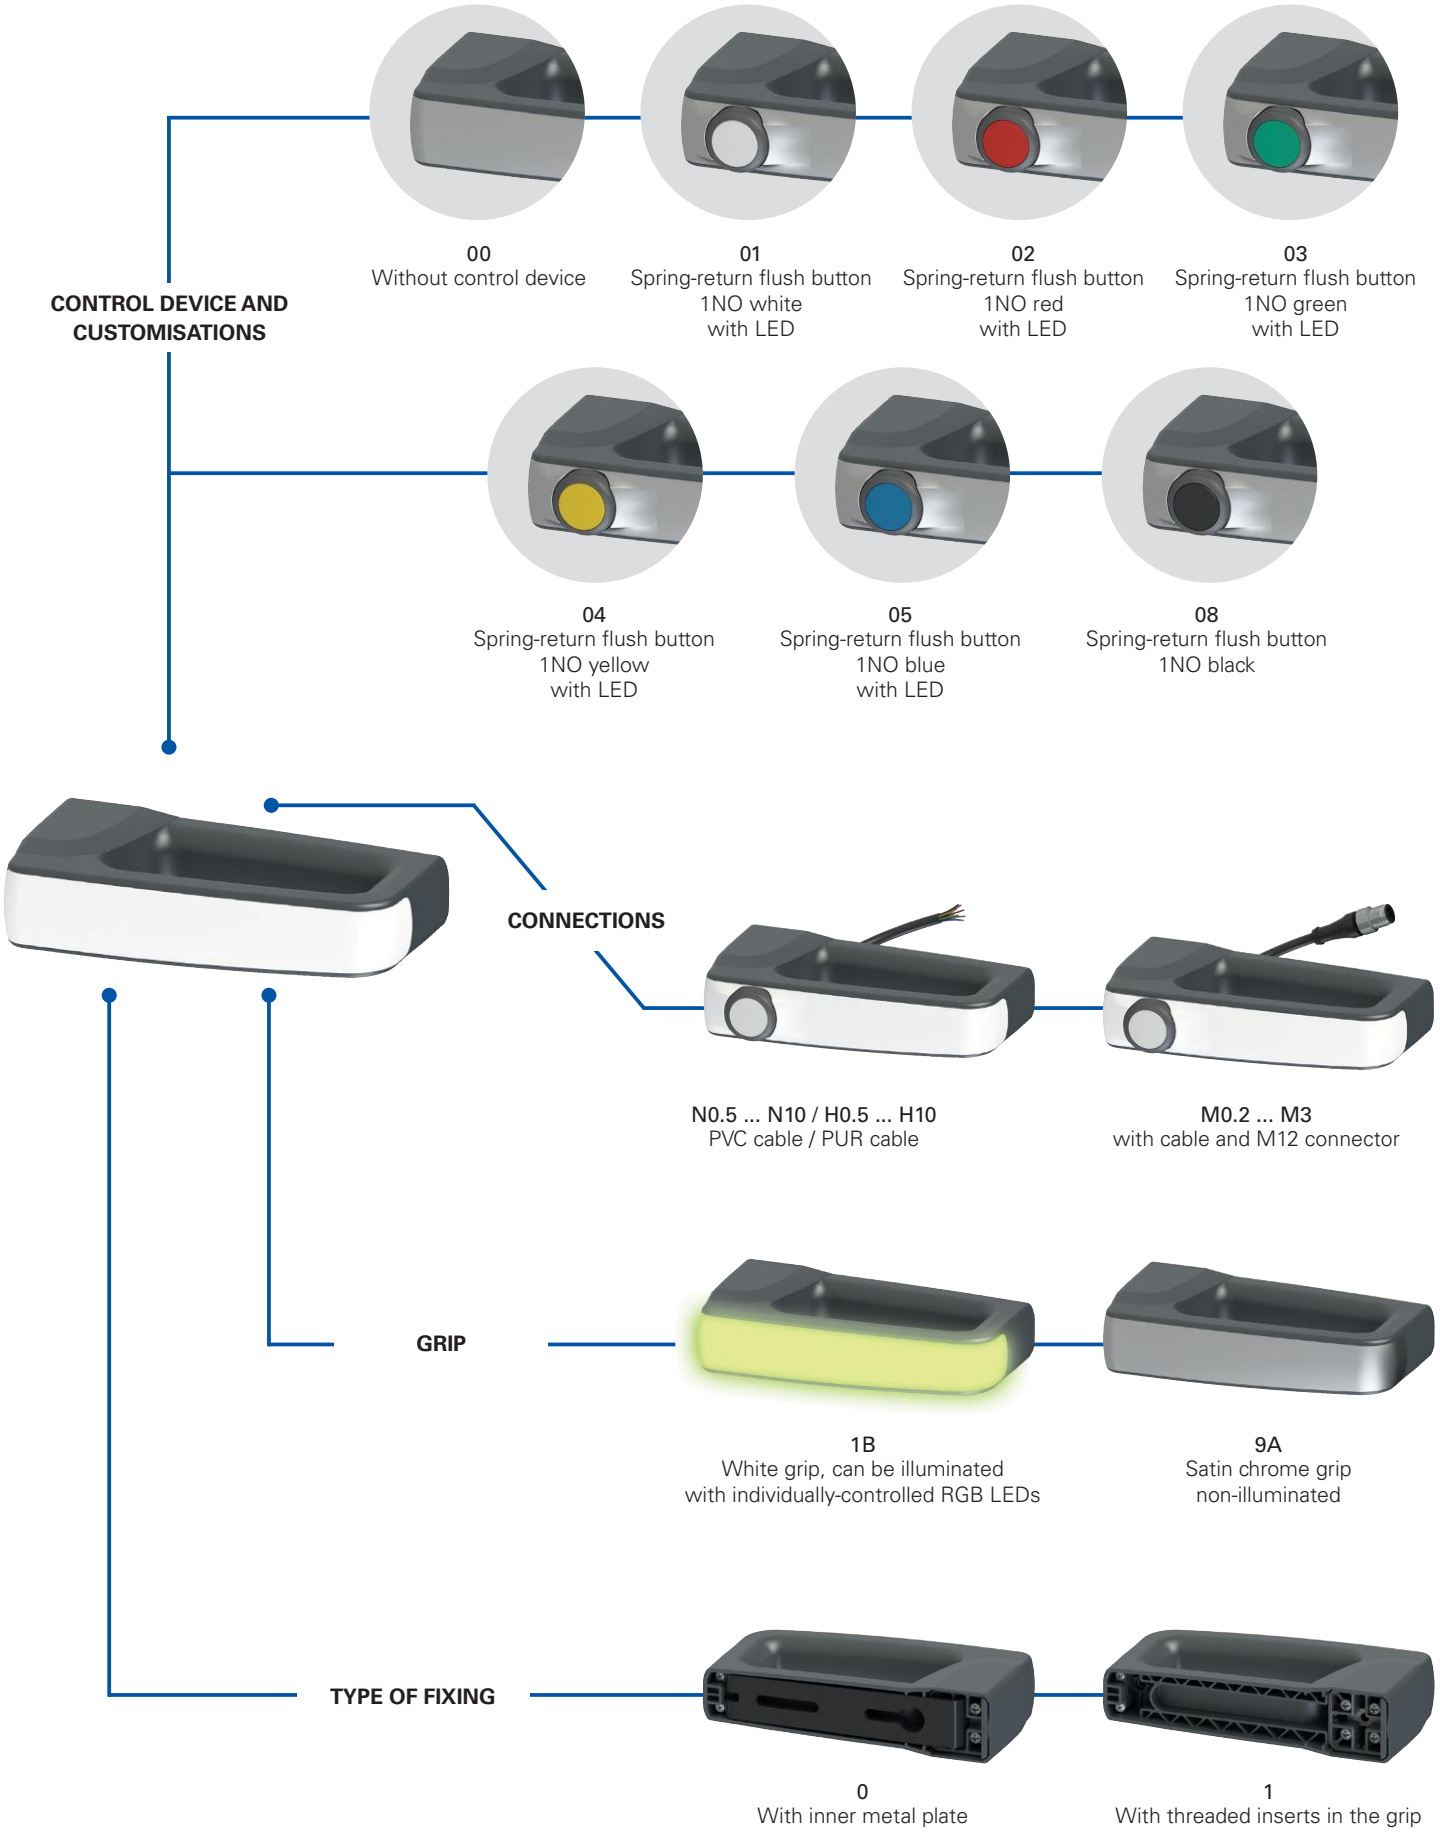

product option

Product sold separately

Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article: **ANT1B000A1** options: **-PN3**

Device type	
T	For ST series RFID sensors

Note: the sensors must be purchased separately.

Grip	
1B	White grip, can be illuminated with multi-color RGB LEDs supply voltage 24 Vdc
9A	Satin chrome grip non-illuminated

Type of fixing	
0	With inner metal plate
1	On the grip with threaded inserts

Control device and customisations	
00	Without control device
01	Spring-return flush button 1NO white with LED
02	Spring-return flush button 1NO red with LED
03	Spring-return flush button 1NO green with LED
04	Spring-return flush button 1NO yellow with LED
05	Spring-return flush button 1NO blue with LED
08	Spring-return flush button 1NO black


1NC, 1NO+1NC, 2NC or 2NO contacts available on request.
Other control devices available on request.
For further information contact our technical department.

RFID coding	
Z	Without RFID tag
0	With RFID tag with low coding level The ST sensor identifies any RFID tag of type 0
1	With RFID tag with high coding level The ST sensor identifies one single RFID tag of type 1

Cable type and connection	
M0.2	PVC cable, IEC 60332-1-2 oil resistant, length 0.15 m and M12 connector (standard)
M0.5	PVC cable, IEC 60332-1-2 oil resistant, length 0.5 m and M12 connector
...	...
M3	PVC cable, IEC 60332-1-2 oil resistant, length 3 m and M12 connector
N0.5	PVC cable, IEC 60332-1-2 oil resistant, length 0.5 m
...	...
N3	PVC cable, IEC 60332-1-2 oil resistant, length 3 m (standard)
...	...
N10	PVC cable, IEC 60332-1-2 oil resistant, length 10 m
H0.5	PUR cable, halogen free, length 0.5 m
...	...
H3	PUR cable, halogen free, length 3 m (standard)
...	...
H10	PUR cable, halogen free, length 10 m

Output direction, connections	
P	rear output

P-KUBE Smart safety handles for ST series RFID sensors

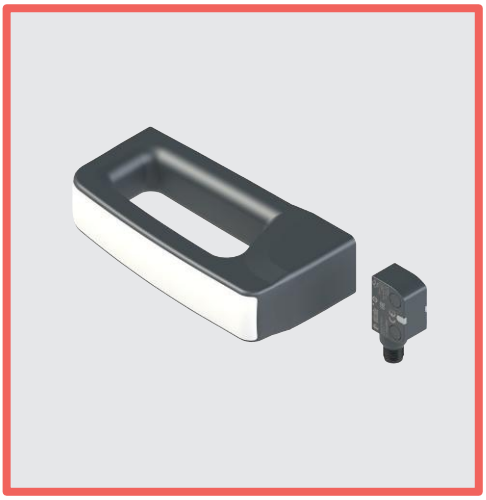

Main features

- Modern and ergonomic design
- Versions with integrated RGB LEDs, for local signalling of guard state
- Customisable multicoloured illumination
- Illuminated control button integrated into grip
- Possibility of application with horizontal or vertical handle
- Direct fixing on the grip or through solid inner plate
- Usable with ST series RFID safety sensors

Quality marks:

UL approval: E131787
TÜV SÜD approval: Z10 075157 0026 (in combination with ST series)
EAC approval: RU Д-IT.PA07.B.37848/24

Features approved by UL

Enviromental ratings:
Type 4X, 12, 13 (models without control component).
Type 1 (models with control component).

Electrical ratings:
Main rating (LED supply): 24 Vdc Class 2, 75 mA
Secondary ratings (Contacts ratings control component):
Silver contacts: 24 Vac Class 2, 1 A, Pilot Duty
24 Vdc Class 2, 0.27 A, Pilot Duty
Golden contacts: 24 Vdc Class 2, 100 mA

Accessory for series ST, ANT models.

Technical data

Materials
Internal fixing plate in steel, oven-cured powder-coated.
Glass fibre reinforced technopolymer grip, self-extinguishing and shock-proof.

Electrical cables
Integrated mobile installation cable 8 x 0.25 mm² or 5 x 0.25 mm².
Versions with 3 m integrated cable, other lengths 0.5 to 10 m on request.
Versions with 0.15 m cable length and M12 connector, other lengths 0.15 … 3 m available on request.

General data

Protection degree	
Versions with control device:	IP65 acc. to EN 60529
Versions without control device:	IP67 acc. to EN 60529 IP69K acc. to ISO 20653
Ambient temperature:	-20°C ... +50°C
Storage temperature:	-40°C ... +75°C
Mission time:	20 years

Power supply electrical data

Rated operating voltage U_e:	24 Vdc ± 15%
Operating current at U_e voltage:	60 mA max
External protection fuse:	1 A type Gg or equivalent device

Electrical data of RGB LED control inputs

Rated operating voltage U_{e1}:	24 Vdc
Operating current at U_{e1} voltage:	5 mA
RGB LED life:	min. 100,000 hours at rated voltage and +25 °C ambient temperature

Technical data, spring return button

Mechanical endurance:	1 million operating cycles
Actuating force:	4 N min, 100 N max
Material of the contacts:	silver contacts
Contact type:	Self-cleaning contacts with double interruption
Thermal current I_{th2}:	1 A
Rated insulation voltage U_{i2}:	32 Vac/dc
Rated impulse withstand voltage U_{imp2}:	1.5 kV
LED supply voltage:	24 Vdc ± 15%
Single LED supply current:	10 mA
Utilization category of the contact block:	DC13; U_{e2}=24 Vdc, I_{e2}=0.55 A

Actuation data

Assured operating distance S_{ao}:	11 mm
Assured release distance S_{ar}:	24 mm
Rated operating distance S_n:	15 mm
Rated release distance S_{nr}:	18.5 mm
Repeat accuracy:	≤ 10 % s_n
Differential travel:	≤ 20 % s_n
RFID transponder frequency:	125 kHz
Max. switching frequency:	1 Hz

In compliance with standards:
For articles with integrated electrical parts:
IEC 60947-5-1, EN 60947-5-1, IEC 60947-1, EN 60947-1, IEC 60529, EN 60529, EN IEC 63000, UL 508, CSA C22.2 No. 14.

Compliance with the requirements of:
For articles with integrated electrical parts:
Low Voltage Directive 2014/35/EU,
EMC Directive 2014/30/EU.
RoHS Directive 2011/65/EU.

Selection table for handles

With RFID at a high coding level for ST series sensors. Connection cable not necessary

	With satin chrome grip with fixing on internal metal plate	With satin chrome grip with fixing on the grip
		
Without control device	ANT9A000A1	ANT9A100A1

With 3 m long PVC cable and RFID at a high coding level for ST series sensors

	With satin chrome grip with fixing on internal metal plate	With satin chrome grip with fixing on the grip	With illuminated white grip with fixing on the internal metal plate	With illuminated white grip with fixing on the grip
				
Without control device	/	/	ANT1B000A1-PN3	ANT1B100A1-PN3
With spring-return button, 1NO, white, illuminated	ANT9A001A1-PN3	ANT9A101A1-PN3	ANT1B001A1-PN3	ANT1B101A1-PN3
With spring-return button, 1NO, red, illuminated	ANT9A002A1-PN3	ANT9A102A1-PN3	ANT1B002A1-PN3	ANT1B102A1-PN3
With spring-return button, 1NO, green, illuminated	ANT9A003A1-PN3	ANT9A103A1-PN3	ANT1B003A1-PN3	ANT1B103A1-PN3
With spring-return button, 1NO, yellow, illuminated	ANT9A004A1-PN3	ANT9A104A1-PN3	ANT1B004A1-PN3	ANT1B104A1-PN3
With spring-return button, 1NO, blue, illuminated	ANT9A005A1-PN3	ANT9A105A1-PN3	ANT1B005A1-PN3	ANT1B105A1-PN3
With spring-return button, 1NO, black, non-illuminated	ANT9A008A1-PN3	ANT9A108A1-PN3	ANT1B008A1-PN3	ANT1B108A1-PN3

With 0.15 m long PVC cable and M12 connector and RFID at a high coding level for ST series sensors

	With satin chrome grip with fixing on internal metal plate	With satin chrome grip with fixing on the grip	With illuminated white grip with fixing on the internal metal plate	With illuminated white grip with fixing on the grip
				
Without control device	/	/	ANT1B000A1-PM0.2	ANT1B100A1-PM0.2
With spring-return button, 1NO, white, illuminated	ANT9A001A1-PM0.2	ANT9A101A1-PM0.2	ANT1B001A1-PM0.2	ANT1B101A1-PM0.2
With spring-return button, 1NO, red, illuminated	ANT9A002A1-PM0.2	ANT9A102A1-PM0.2	ANT1B002A1-PM0.2	ANT1B102A1-PM0.2
With spring-return button, 1NO, green, illuminated	ANT9A003A1-PM0.2	ANT9A103A1-PM0.2	ANT1B003A1-PM0.2	ANT1B103A1-PM0.2
With spring-return button, 1NO, yellow, illuminated	ANT9A004A1-PM0.2	ANT9A104A1-PM0.2	ANT1B004A1-PM0.2	ANT1B104A1-PM0.2
With spring-return button, 1NO, blue, illuminated	ANT9A005A1-PM0.2	ANT9A105A1-PM0.2	ANT1B005A1-PM0.2	ANT1B105A1-PM0.2
With spring-return button, 1NO, black, non-illuminated	ANT9A008A1-PM0.2	ANT9A108A1-PM0.2	ANT1B008A1-PM0.2	ANT1B108A1-PM0.2


Note: To order a product with PUR cable, replace the letter N or M with the letter H in the order codes shown above.

P-KUBE Smart safety handles for ST series RFID sensors

Selection table for sensors

OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable	with 0.2 m cable length and M12 connector	with cable	with M12 connector
2	1	2	1	-	•	ST GD420M0.2	ST GD420N•	ST GD420MP


Electrical connections





Versions with button articles ANT9A••••


Pin	Cable colour	Connection
1	brown	Supply to white button LED +24 Vdc
2	white	Supply to white button LED 0 V
3	blue	Disconnected
4	black	Button NO contact
5	grey	Button NO contact





Versions with illuminated grip articles ANT1B000•

Pin	Cable colour	Connection
1	brown	Supply input +24 Vdc
2	white	Supply input 0 Vdc
3	blue	Control input blue (B) +24 Vdc
4	black	Control input red (R) +24 Vdc
5	grey	Control input green (G) +24 Vdc





Versions with button and illuminated grip articles ANT1B••••

Pin	Cable colour	Connection
1	white	Supply input 0 Vdc
2	brown	Supply input +24 Vdc
3	green	Control input green (G) +24 Vdc
4	yellow	LED power supply for button lighting +24 Vdc
5	grey	Button NO contact
6	pink	Button NO contact
7	blue	Control input blue (B) +24 Vdc
8	red	Control input red (R) +24 Vdc


LED grip lighting combinations

R	G	B	Colour	R	G	B	Colour
0	0	0		1	1	0	
1	0	0		1	0	1	
0	1	0		0	1	1	
0	0	1		1	1	1	


0 = colour control input off, 1 = colour control input on.

Dimensional drawings


Internal fixing plate (articles ANT••0••••)

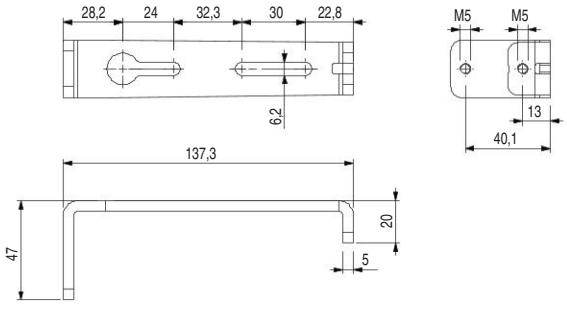

Grip

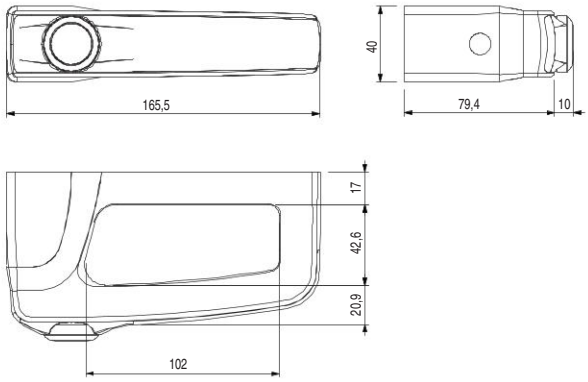

Threaded fixing inserts (articles ANT••1••••)



All values in the drawings are in mm

➔ The 2D and 3D files are available at **www.pizzato.com**

Notes