
Selection diagram

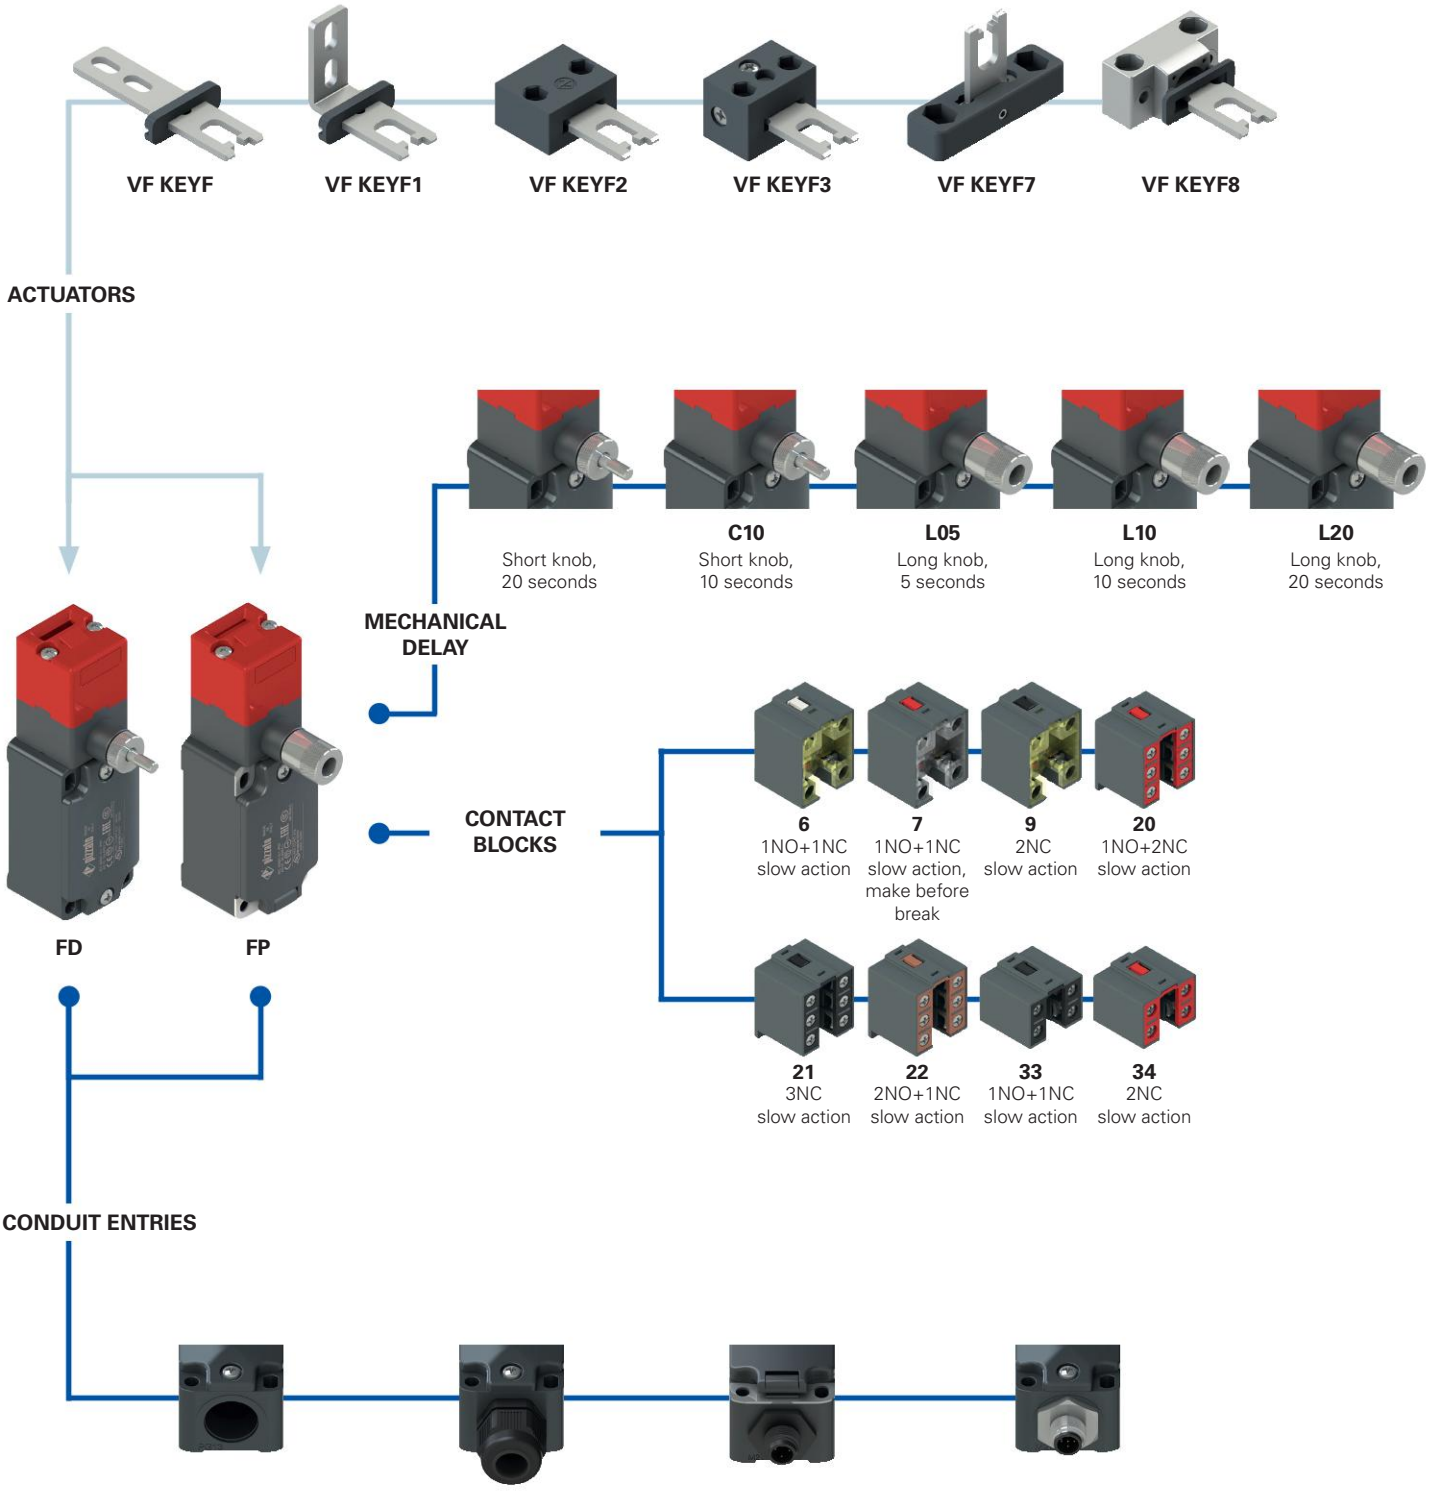

Threaded conduit entry (standard)	
M2	M20x1.5 (standard)
	PG 13.5

With cable gland	
K23	for cables Ø 6 … 12 mm
K27	for cables Ø 3 … 7 mm

With M12 plastic connector	
K45	8-pole, bottom
K70	4-pole, bottom

With M12 metal connector	
K40	8-pole, bottom
K60	4-pole, bottom

product option

Sold separately as accessory

Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article | options | options

FD 6R2-L10F1GM2K50T6

Housing	
FD	metal, one conduit entry
FP	technopolymer, one conduit entry

Contact block	
6	1NO+1NC, slow action
7	1NO+1NC, slow action, make before break
9	2NC, slow action
20	1NO+2NC, slow action
21	3NC, slow action
22	2NO+1NC, slow action
33	1NO+1NC, slow action
34	2NC, slow action

Mechanical delay	
	short knob, 20 s (standard)
C10	short knob, 10 s
L05	long knob, 5 s
L10	long knob, 10 s
L20	long knob, 20 s

Actuators	
	without actuator (standard)
F	straight actuator VF KEYF
F1	angled actuator VF KEYF1
F2	jointed actuator VF KEYF2
F3	jointed actuator adjustable in two directions VF KEYF3
F7	jointed actuator adjustable in one direction VF KEYF7
F8	universal actuator VF KEYF8

Contact type	
	silver contacts (standard)
G	silver contacts with 1 µm gold coating
G1	silver contacts, 2.5 µm gold coating (not for contact blocks 20, 21, 22, 33, 34)


Threaded conduit entry	
M2	M20x1.5 (standard)
	PG 13.5

Ambient temperature	
	-25°C … +80°C (standard)
T6	-40°C … +80°C

Pre-installed cable glands or connectors	
	no cable gland or connector (standard)
K23	cable gland for cables Ø 6 … 12 mm
K40	M12 metal connector, 8-pole
K50	M12 metal connector, 5-pole
…	…

For the complete list of possible combinations please contact our technical department.

Safety switches with **manual mechanical delay** and separate actuator

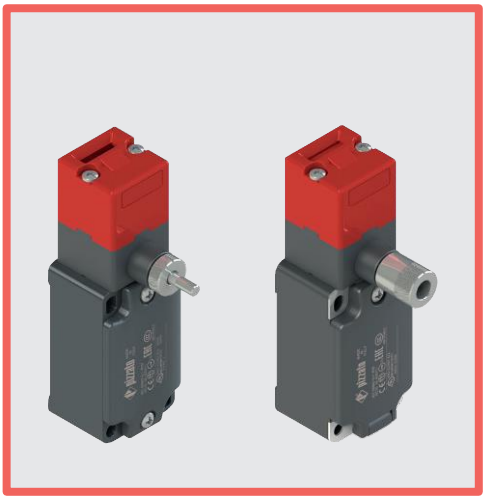

Main features

- Metal housing or technopolymer housing, one conduit entry
- Protection degree IP67
- 8 contact blocks available
- 6 stainless steel actuators available
- Versions with assembled M12 connector
- Versions with gold-plated silver contacts
- Strong actuator locking (1000 N)
- Manual actuator release
- Versions with different release delay times

Quality marks:

IMQ approval:	EG605
UL approval:	E131787
CCC approval:	2024010305654835
EAC approval:	RU Д-IT.PA07.B.37848/24

Technical data

Housing

FP series housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation: ⧈
FD series: metal housing, baked powder coating.

One threaded conduit entry:	M20x1.5 (standard)
Protection degree:	IP67 acc. to EN 60529 with cable gland of equal or higher protection degree

General data

"Maximum SIL" up to:	SIL 3 acc. to EN IEC 62061
Performance Level (PL) up to:	PL e acc. to EN ISO 13849-1
Interlock with mechanical lock, coded:	type 2 acc. to EN ISO 14119
Coding level:	low acc. to EN ISO 14119
Safety parameters:	
B_{10D}:	1,000,000 for NC contacts
Mission time:	20 years
Ambient temperature:	-25°C … +80°C (standard) -40°C … +80°C (T6 option)
Max. actuation frequency:	360 operating cycles/hour
Mechanical endurance:	500,000 operating cycles
Max. actuation speed:	0.5 m/s
Min. actuation speed:	1 mm/s
Maximum force before breakage F_{TEST}	1000 N acc. to EN ISO 14119
Max. holding force F_{ZH}	770 N acc. to EN ISO 14119
Max. clearance of the actuator:	4.5 mm
Tightening torques for installation:	see page 387
Wire cross-sections and wire stripping lengths:	see page 407

In compliance with standards:
IEC 60947-5-1, IEC 60947-1, IEC 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN IEC 63000, BG-GS-ET-15, UL 508, CSA C22.2 No. 14.
Approvals:
EN 60947-5-1, UL 508, CSA C22.2 No. 14, GB/T14048.5

Compliance with the requirements of:
Machinery Directive 2006/42/EC, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.
Positive contact opening in conformity with standards:
IEC 60947-5-1, EN 60947-5-1.

⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see chapter Utilization requirements from page 385 to page 400.

Electrical data			Utilization category
without connector	Thermal current (I_{th}):	10 A	
	Rated insulation voltage (U_i):	500 Vac 600 Vdc 400 Vac 500 Vdc (contact blocks 20, 21, 22, 33, 34)	Alternating current: AC15 (50÷60 Hz) U_e (V) 250 400 500 I_e (A) 6 4 1
	Rated impulse withstand voltage (U_{imp}):	6 kV 4 kV (contact blocks 20, 21, 22, 33, 34)	Direct current: DC13
	Conditional short circuit current:	1000 A acc. to EN 60947-5-1	U_e (V) 24 125 250
	Protection against short circuits:	type aM fuse 10 A 500 V	I_e (A) 3 0.55 0.3
	Pollution degree:	3	
with M12 connector, 4 and 5-pole	Thermal current (I_{th}):	4 A	Alternating current: AC15 (50÷60 Hz) U_e (V) 24 120 250
	Rated insulation voltage (U_i):	250 Vac 300 Vdc	I_e (A) 4 4 4
	Protection against short circuits:	type gG fuse 4 A 500 V	Direct current: DC13
	Pollution degree:	3	U_e (V) 24 125 250 I_e (A) 3 0.55 0.3
with M12 connector, 8-pole	Thermal current (I_{th}):	2 A	Alternating current: AC15 (50÷60 Hz) U_e (V) 24
	Rated insulation voltage (U_i):	30 Vac 36 Vdc	I_e (A) 2
	Protection against short circuits:	type gG fuse 2 A 500 V	Direct current: DC13
	Pollution degree:	3	U_e (V) 24 I_e (A) 2

Features approved by IMQ

Rated insulation voltage (U_i):	500 Vac 400 Vac (for contact blocks 2, 11, 12, 20, 21, 22, 28, 29, 30, 33, 34, 37)
Conventional free air thermal current (I_{th}):	10 A
Protection against short circuits:	type aM fuse 10 A 500 V
Rated impulse withstand voltage (U_{imp}):	6 kV 4 kV (for contact blocks 20, 21, 22, 28, 29, 30, 33, 34)
Protection degree of the housing:	IP67
MV terminals (screw terminals)	
Pollution degree:	3
Utilization category:	AC15
Operating voltage (U_e):	400 Vac (50 Hz)
Operating current (I_e):	3 A

Forms of the contact element: Za, Za+Za, X+X, Zb, Y+Y, Y+Y+X, Y+Y+Y, Y+X+X, Y, X.
Positive opening of contacts on contact blocks 5, 6, 7, 8, 9, 11, 13, 14, 16, 17, 18, 19, 20, 21, 22, 28, 29, 30, 33, 34, 37, 38, 39, 66.
In compliance with standards: EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Please contact our technical department for the list of approved products.

Features approved by UL

Electrical Ratings:	Q300 pilot duty (69 VA, 125-250 V dc) A600 pilot duty (720 VA, 120-600 V ac)
Environmental Ratings:	Types 1, 4X, 12, 13

Use 60 or 75 °C copper (Cu) conductor and wire size range 12, 14 AWG, stranded or solid. The terminal tightening torque of 7.1 lb in (0.8 Nm).

For FP series: the hub is to be connected to the conduit before the hub is connected to the enclosure.

Please contact our technical department for the list of approved products.


Description



These switches are used on machines where the hazardous conditions remain for a while, even after the machine has been switched off, for example because of mechanical inertia of the pulleys, saw disks, mills. This switch has its ideal application where the guard is not opened frequently and the installation of a switch with solenoid would be too expensive.
These switches are considered interlocks with guard locking in accordance with ISO 14119, and the product is marked on the side with the symbol shown.




Head and knobs with variable orientation

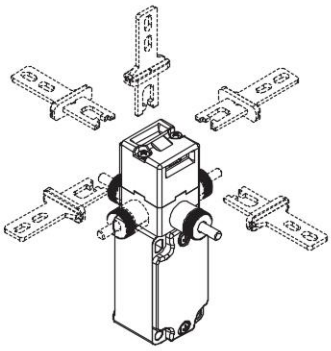

The head can be quickly turned to each of the four sides of the switch by unfastening the two fastening screws.
The mechanical delay device can be rotated in 90° steps as well. This enables the switch to assume 32 different configurations.

Adjustment range



The actuation head of this switch features a wide range of travel. In this way the guard can oscillate along the direction of insertion (4.5 mm) without causing unwanted machine shutdowns. This wide range of travel is available in all actuators in order to ensure maximum device reliability.

Protection degree IP67

IP67


These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing.

Contact blocks



Contact blocks with captive screws, finger protection, twin bridge contacts and double interruption for higher contact reliability. Available in multiple versions with shifted, simultaneous or overlapping actuation paths. They are suitable for many different applications.

Holding force of the unlocked actuator



The inside of each switch features a device which holds the actuator in its closed position. Ideal for all those applications where several guards are unlocked simultaneously, but only one is actually opened. The device keeps all the unlocked guards in their position with a retaining force of approx. 30 N, stopping any vibrations or gusts of wind from opening them.

Extended temperature range

-40°C


These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +80°C.
They can therefore be used for applications in cold stores, sterilisers and other equipment with low temperature environments. The special materials used to produce these versions retain their characteristics even under these conditions, thereby expanding the installation possibilities.

Laser engraving



All devices are marked using a dedicated indelible laser system. These engravings are therefore suitable for extreme environments too. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time.


Safety screws for actuators




As required by EN ISO 14119, the actuator must be fixed immovably to the guard frame. Pan head safety screws with one-way fitting are available for this purpose. With this screw type, the actuators cannot be removed or tampered by using common tools. See accessories on page 357.

Operation (FP 6R2-M2F1)

The switch is fastened to the machine body (A), while the stainless steel actuator is fastened to the guard (B). Once installed, the switch will firmly lock the actuator. In order to remove the actuator, the knob (C) has to be rotated. On the first turns the electrical contacts will positively open, then, after about 20 seconds (or 10 seconds depending on the version), the actuator will be released. In order to close the guard, the knob must be rotated in the opposite direction. This switch doesn't need power supply or timer and can be easily installed on old machines without important changes in their electrical circuit. The knob (C) may be supplied in a short (standard) or in a long version.

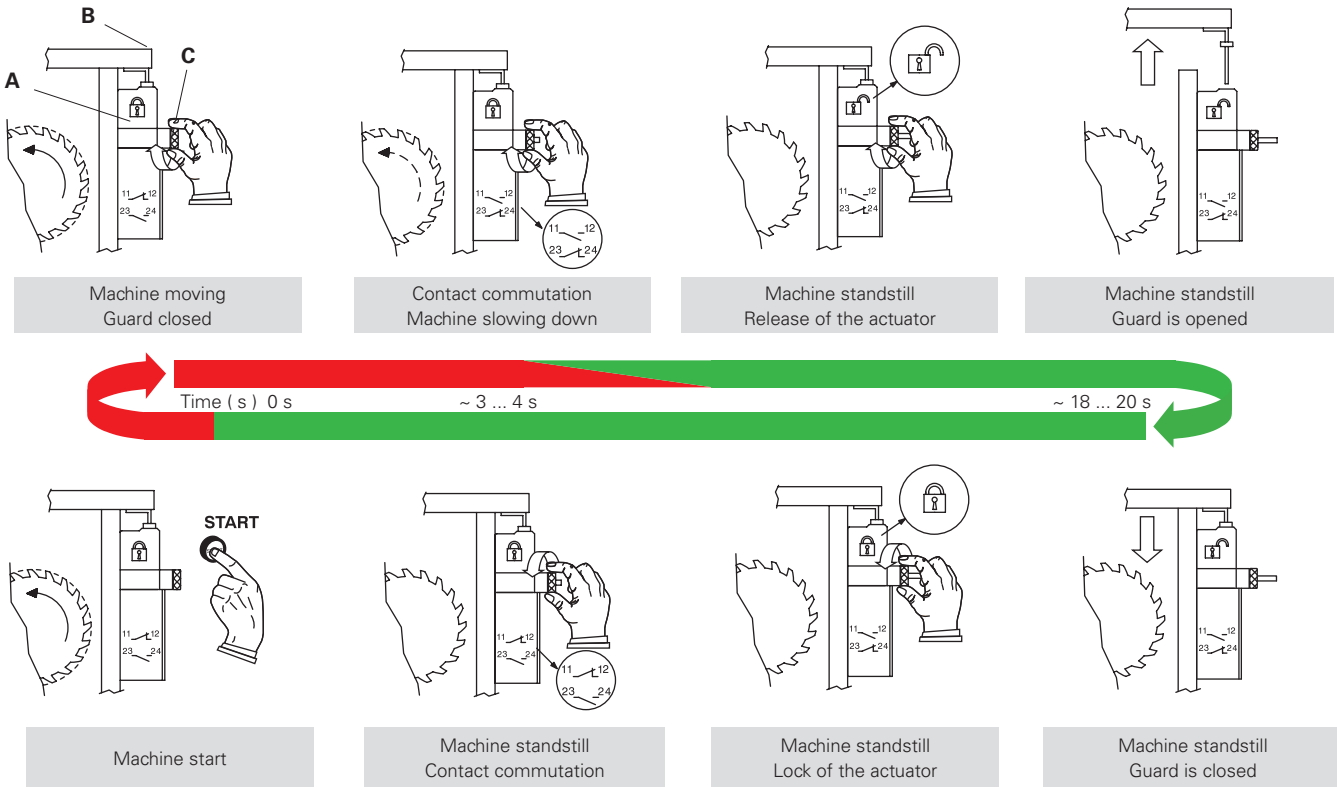















Operating phases (FD 6R2-M2F1)

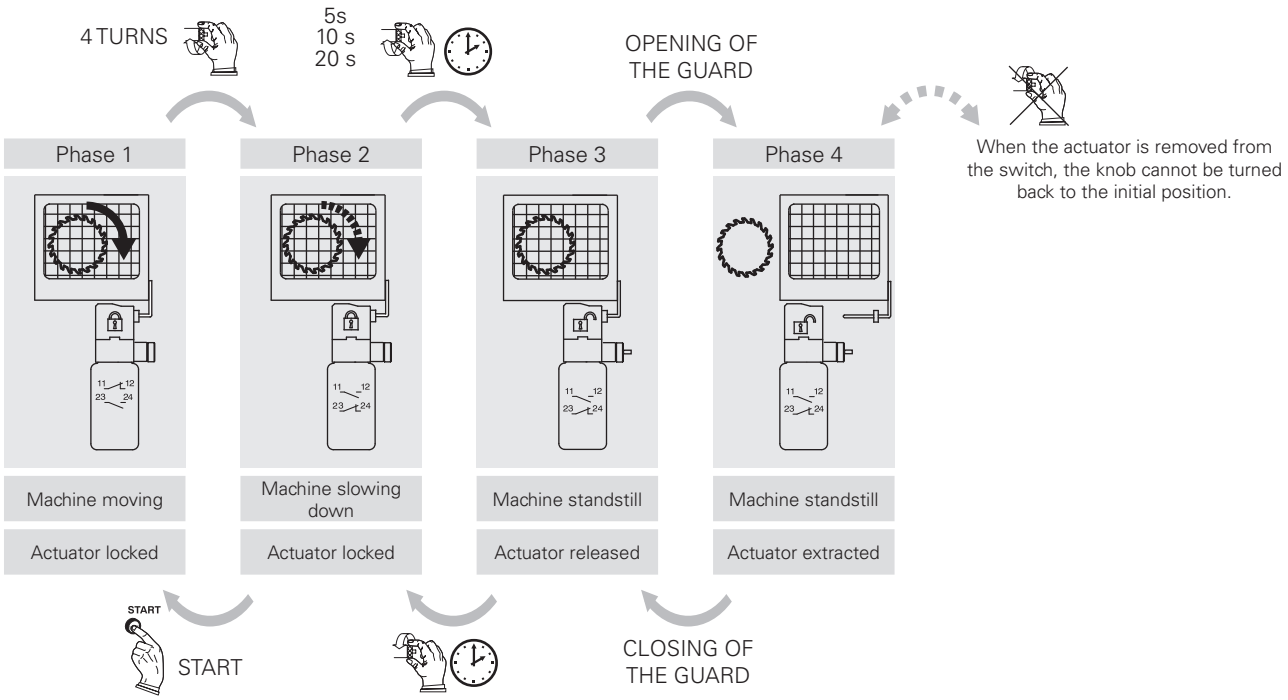

Contact type:

L = slow action
LO = slow action, make before break

Contact block


		Technopolymer housing Without actuator	Metal housing Without actuator	Metal housing Without actuator
				
6	L	FP 6R2-M2 1NO+1NC	FD 6R2-M2 1NO+1NC	FD 6R2-L10M2 1NO+1NC
				
7	LO	FP 7R2-M2 1NO+1NC	FD 7R2-M2 1NO+1NC	FD 7R2-L10M2 1NO+1NC
				
9	L	FP 9R2-M2 2NC	FD 9R2-M2 2NC	FD 9R2-L10M2 2NC
				
20	L	FP 20R2-M2 1NO+2NC	FD 20R2-M2 1NO+2NC	FD 20R2-L10M2 1NO+2NC
				
21	L	FP 21R2-M2 3NC	FD 21R2-M2 3NC	FD 21R2-L10M2 3NC
				
22	L	FP 22R2-M2 2NO+1NC	FD 22R2-M2 2NO+1NC	FD 22R2-L10M2 2NO+1NC
				
33	L	FP 33R2-M2 1NO+1NC	FD 33R2-M2 1NO+1NC	FD 33R2-L10M2 1NO+1NC
				
34	L	FP 34R2-M2 2NC	FD 34R2-M2 2NC	FD 34R2-L10M2 2NC
				
Actuating force		10 N (18 N ⊖)	10 N (18 N ⊖)	10 N (18 N ⊖)

All values in the diagrams are in turns of the knob

Legend: ⊖ With positive opening according to EN 60947-5-1, interlock with lock monitoring acc. to EN ISO 14119

How to read travel diagrams

All values in the diagrams are in turns of the knob

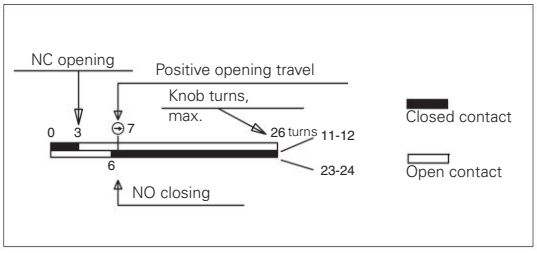

IMPORTANT:
The state of the NC contact refers to the switch with inserted actuator and with the knob turned anti-clockwise up to the end of the travel. For**installation in safety applications**, actuate the switch **at least up to the positive opening travel** shown in the travel diagrams with symbol ⊖. Actuate the switch **at least with the positive opening force**, reported in brackets below each article, next to the actuating force value.

Limits of use

Do not use where dust and dirt may penetrate in any way into the head and deposit there. Especially not where powder, shavings, concrete or chemicals are sprayed. Adhere to the EN ISO 14119 requirements regarding low coding level for interlocks. Do not use in environments with presence of explosive or flammable gas. In these cases, use ATEX products (see dedicated Pizzato catalogue).
Attention! These switches alone are not suitable for applications where operators may physically enter the dangerous area, because an eventual closing of the door behind them could restart the machine operation. In these cases, the maintenance personnel must use the actuator entry locking device VF KB1 shown on page 112.

All values in the drawings are in mm

Accessories See page 357


➔ The 2D and 3D files are available at **www.pizzato.com**

Stainless steel actuators

IMPORTANT: These actuators can be used only with items of the FD, FP, FL, FC and FS series (e.g. FD 6R2-M2).
Low coding level acc. to EN ISO 14119.


Article	Description
VF KEYF	Straight actuator



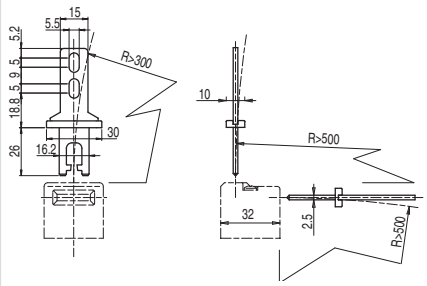


Article	Description
VF KEYF1	Angled actuator



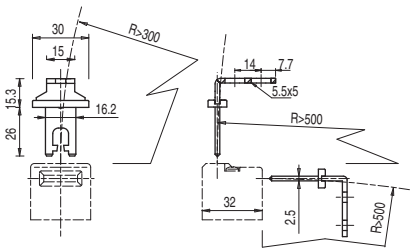

Article	Description
VF KEYF2	Jointed actuator




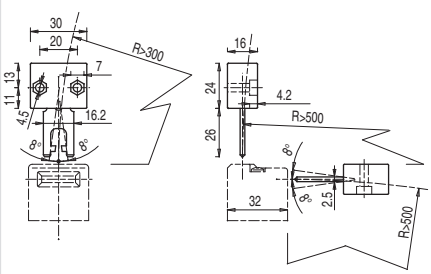

The actuator can flex in four directions for applications where the guard alignment is not precise.

Article	Description
VF KEYF3	Actuator adjustable in two directions




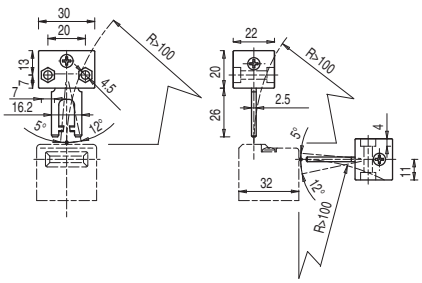

Actuator adjustable in two directions for guards with reduced dimensions.

Article	Description
VF KEYF7	Actuator adjustable in one direction



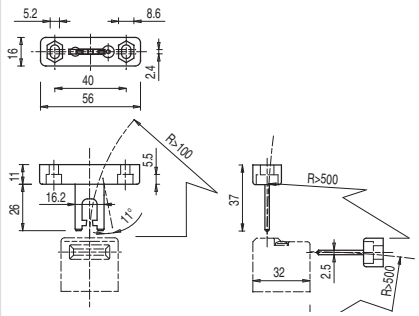

Actuator adjustable in one direction for guards with reduced dimensions.

All values in the drawings are in mm


Accessories See page 357


→ The 2D and 3D files are available at **www.pizzato.com**


Universal actuator VF KEYF8

IMPORTANT: These actuators can be used only with items of the FD, FP, FL, FC and FS series (e.g. FD 6R2-M2).
Low coding level acc. to EN ISO 14119.


Article	Description
VF KEYF8	Universal actuator



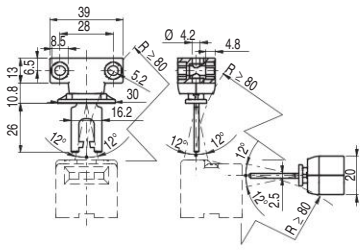

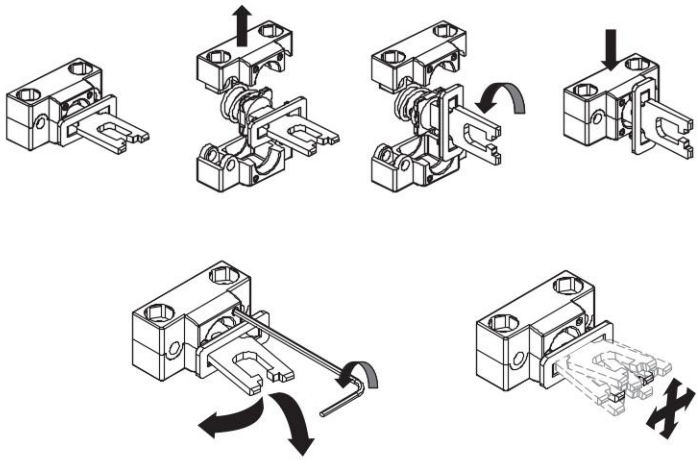


Jointed actuator for guards with poor alignment, adjustable in two dimensions for small doors; can be mounted in various positions.
The metal fixing body has two pairs of bore holes; it is provided for rotating the working plane of the actuator by 90°.

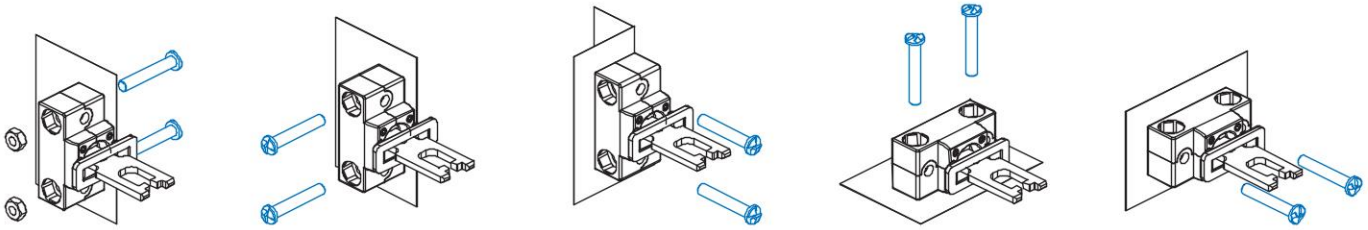

Accessories

Article	Description
VF KB1	Lock-out device



Padlockable lock-out device to prevent the actuator entry and the accidental closing of the door behind operators while they are in the danger area.
Hole diameter for padlocks: 9 mm.



All values in the drawings are in mm

Accessories See page 357

➔ The 2D and 3D files are available at **www.pizzato.com**